




UVB 460 UV PROTECTION

INTERNAL INSTALLATION

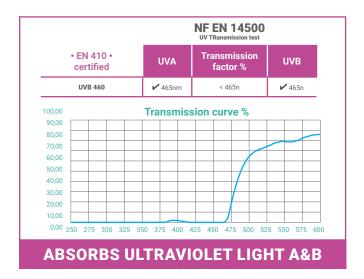

DESCRIPTION

This transparent film has been designed to be applied to windows in such a way as to be practically invisible. It slows down UVA and B rays to prevent fading of store windows or certain diseases related to UVA and UVB.





Durability: 12 to 15 years for a vertical application in Central Europe.



Use: for all types of glass.



Maintenance: after 30 days with a usual cleaning solution (non abrasive, without ammonia...). Cleaning products that could scratch are not recommended.



Storage: 2 years from delivery. This film must be stored away from excessive humidity and sunlight, at a temperature below 38°C.

In order to meet high standards, we recommend that you do not mix films from different productions

INFORMATION

MATERIAL:	PET
ADHESIVE :	Acrylic polymer 13 gr/m ²
LINER:	Siliconized PET 23 microns
THICKNESS:	36 microns
UV BLOCKING :	99 %
COLOR:	Incolor
APPLICATION SIDE:	Internal
APPLICATION T°:	min, + 5°C
STANDARDS:	EUROCLASSES
FIRE RANTING:	B-s1,d0
GUARANTEE:	10 Years inside*

* For glazing not exposed to the sun

DIMENSIONS

By roll:



1,52 x

10 m 30 m

Application





Video of the installation





Method of application

The surface to be bonded must be free of dust, grease or any other contaminant. Some materials such as polycarbonate can cause bubbling problems. A compatibility test is therefore recommended. Possibility to install on plexiglass and polycarbonate.

Production monitoring and standards

In order to constantly improve our productions, we may have to modify without notice the colors and manufacturing processes. We recommend to our users, before applying our films, to make sure that they are exactly suitable for the intended use and to comply with the standards in force.